


VISUM3 Data Sheet

Manufacturer: Cerámica La Escandella S.A.
 Production site: Agost (Alicante) - Spain
 Brand name: Visum3 - TW

Dimensions* **TW**
A 471 mm / 18.54"
B 280 mm / 11"
C 35 mm / 1.38"

Longitudinal fit** 187 mm (+4; - 10 mm) / 7.36" (+0.16"; 0.39")
 Transversal fit** 435 mm (±1 mm) / 17.12" (±0.04")
 Pieces/m² - Pieces/sq 11.5 - 106.7
 Weight piece 3.5 kg / 7.7 lbs
 Units per pallet 216 / 288
 Weight per pallet 756 kg (1,666.9 lbs) / 1,008 kg (2,222.3 lbs)

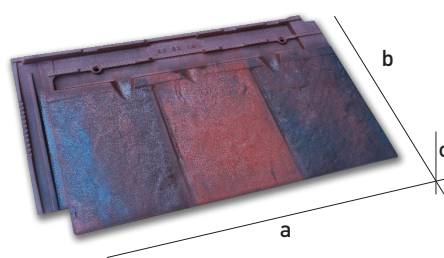

*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%
 **Theoretic value: this should be re-calculated on site with the tiles that are to be used.

Structural characteristics:	UNE EN 1304	≤ 2.5
Camber/Twist:	UNE EN 1024	L > 300mm ; ≤ 1.5
Impermeability (cm ³ / cm ² * day):	UNE EN 539-1	Mean value ≤ 0.5 ; Individual value ≤ 0,6
Flexural strenght:	UNE EN 538	≥ 1200
Frost resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}

Additional information

Unitary mass: 3600 gr
 Roof tiles number/m²: 11.5
 Length distance between battens: 18.7 cm (+0.4; -1 cm)
 Surface finish: Surface decoration with coloured engobes
 Fixing types: Nib, nail pre-fixing.

