


INNOVA Data Sheet

Manufacturer: Cerámica La Escandella S.A.
Production site: Agost (Alicante) - Spain
Brand name: Innova - TN

Dimensions* **TN**
A 460 mm / 18.11"
B 255 mm / 10"
C 30 mm / 1.18"

Longitudinal fit** 396 mm (+5; - 75 mm) / 15.6" (+0.19; -2.95")
Transversal fit** 214 mm (± 1 mm) / 8.42" (± 0.04")
Pieces/m² - Pieces/sq 11,5 - 105
Weight piece 3,4 kg / 7.5 lbs
Units per pallet 288
Weight per pallet 979 kg / 2,158 lbs

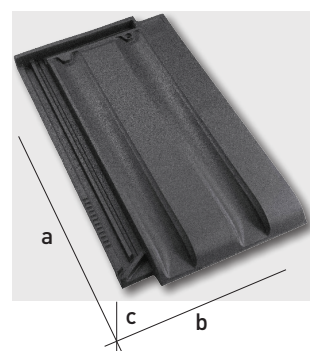

*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%
**Theoretic value: this should be re-calculated on site with the tiles that are to be used.

Structural characteristics:	UNE EN 1304	≤ 2,5
Camber/Twist:	UNE EN 1024	L > 300mm ; ≤ 1,5
Impermeability (cm ³ / cm ² * day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Flexural strenght:	UNE EN 538	≥ 1200
Frost resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}

Additional information

Unitary mass: 3400 gr
Roof tiles number/m²: 11,5
Length distance between battens: 39,6 cm (+0,5; -7,5 cm)
Surface finish: Surface decoration with coloured engobes
Fixing types: Nib, nail pre-fixing.

